

Gang

ISO 9001 : 2015, ISO 14000:2015
OHSAS 18001:2007, Certified Company

LOCKS, LATCHES & HANDLES



Quality the World Trusts



Some Milestones in Group's History :-

- + In 1948 Mr. D. P. Garg starts trading company which continues steady growth.
- + In 1972 his son Mr. S. M. Garg joins the company.
- + In 1978-79 the company sales reached a point where it became necessary for the company to set up its own production facility.
- + In 1980 D. P. Garg & Co. sets up their first production facility for manufacturing of door hinges.
- + **First time in India.** In 1991 The company starts SS hinge production and gets first ISI license in India for SS Hinges.
- + In 1992 Mr. S. M. Garg is appointed as a member of the ISI advisory committee.
- + In 1998 D.P. Garg & Company gets "ISO 9001:2000" certification.
- + In 1998 D.P. Garg & Company becomes a government recognized export house.
- + **First time in India.** In 1999 the company receives national export award in builder's hardware from the then Hon'ble Prime Minister of India Sh. Atal Bihari Vajpayee.
- + **First time in India.** In 1999 the company achieves class 8 and class 9 of BS certification for ball bearing hinges.
- + In 2000 D.P. Garg & Company becomes the first ever manufacturer from India to introduce Electrophoretic Lacquer Coating Technology for hinges.
- + **First time in India.** In 2001 the company achieves class 4 and class 5 certification for premium hinges.
- + **First time in India.** In 2004 CE-13 certification is awarded to D. P. Garg & Co. for SS Ball Bearing Hinges on passing CE-13 Grading as per EN 1935 : 2002 from Warrington.
- + In 2007 the company moves to modern state of art manufacturing facility at B-210-B, Phase-2 Noida. A fully integrated unit with covered area of 2,00,000 Sq. Ft. The biggest facility in India for its product category.
- + In 2009 the Company starts commercial production of locks and export to the European market.
- + **First time in India.** In 2009 Company receives with Certifire Certificate as SSBB Door Hinges.
- + In 2010 starts lever handle manufacturing & exports.
- + In 2011 the Company upgrades its facility, system to achieves both ISO 14001 and ISO 18001. The Company also adds to its CE range of hinges getting two more CE Certifications CE-7 & Ce-11.
- + In 2012 first Laser Marking machine in house.



- + In 2011 the Company upgrades its facility, system to achieves both ISO 14001 and ISO 18001. The Company also adds to its CE range of hinges getting two more CE Certifications CE-7 & CE-11.
- + In 2012 first Laser Marking machine in house.
- + In 2013, continuing its efforts for adding the Product range, production facility for Zinc die cast Handles, Latches, Locks & other Architectural Hardware like SS Lever Handles, D Pull Handles, Signages etc. Investing more than \$ 2 Millions in modernising plant.
- + In 2014, the company was reissued with Certifire Certificate (CF-714) to their range of Stainless Steel Ball Bearing Hinges.
- + In 2015, the company was awarded 'Star Performer' for the year 2013-14 by EEPG Govt. of India.
- + In 2016, the company installed state of art ETP Plants to reduce impact on environment.
- + **First time in India.** In 2017, two automatic plating plants were added for zinc & chrome plating. D.P. Garg & Co. Pvt. Ltd also received 11 certificates of consistency of performances for the range of Tubular Latches, Mortice Locks & Latches from world renowned certifying body 'Warrington Certification' UK and the Certifire Certificate (CF-5531) again from the world renowned certifying body 'Exova Warrington Certifire Certificate, UK'.
- + **First time in India.** In 2018, D. P. Garg & Co. Pvt. Ltd again became the first ever manufacturer from India to get certified for 'Kitemark' accreditation to BS-3621 for its 5 Lever Mortice Sash Locks & Dead Locks product range.
- + In 2018 company also installed RO Plant to become zero discharge unit, thus becomes green unit and later in the year developed water harvesting to become environmental friendly unit with positive impact on water table.
- + In 2019, company developed finishes in EXB, ZP, CP, that passed in excess of 240 hours neutral salt spray testing done by EXOVA.
- + in 2019, Company has started commercial production of its after passing 400 hours of neutral salt spray tests by EXOVA.
- + In 2019, company has started new venture by starting commercial production of Push Bar Panic Bolt device with Dogging Function (horizontal type) in the range of panic exit hardware.
- + In 2019, Company have got tested more than 250 products from world renowned lab - EXOVA thus expanding range of its tested and certified products.



Late Mr. D.P. Garg
(Founder Chairman)

We hold single source responsibility to manufacture full range of steel and stainless steel door hinges / fittings & Locks, Architectural and Ironmongery with quality production and customised packaging, full customer satisfaction and continuously evolving new and higher standards of performance in terms of consumer demands, interests, timely delivery and competitive prices.

We are always willing to offer best services and sincere support to our valued customers. Our quest for quality and customers orientation is a ceaseless one.

***Our dedication towards customer satisfaction
is our prime motto.....***



Mr. S.M. Garg
Chairman

Mr. S.M.Garg, an enterprising torch bearer, is expanding the companies's horizon with his innovative ideas by generating all round glory and diversifying into a group. The group is wholly owned by Garg Family. Under the dynamic supervision and guidance of Mr. S.M. Garg, the Group has ten fully integrated manufacturing units of Builders Hardware with latest technology machines and highly professional manpower capable of executing any task as per the customer's requirements.



Our Founder Chairman, Mr. D.P. Garg, receiving national Export Award in Builder's Hardware from the then Hon'ble Prime Minister of India



Our Chairman Mr. S. M. Garg Receiving Northern Regional Award for Export Excellence from EEPC.



Our Chairman Mr. S. M. Garg, is with Hon'ble Mr. Narendra Modi, Prime Minister of INDIA



Our Chairman Mr. S. M. Garg, is Greeting our Hon'ble Mr. Ram Nath Kovind, President of INDIA



Our Chairman Mr. S. M. Garg, Receiving EEPC Award for Export Excellence



Our Chairman Mr. S. M. Garg, Receiving Northern Regional Award for Export Excellence

LOCK ASSEMBLY DEPARTMENT



* Assembly line based on international standard at par with European Facilities.

PRESS SHOP DEPARTMENT



* Over 250 power presses for complete in house production.

ETP Plant & RO Plant



* Zero discharge plant - Our commitment for better environment future.

R&D, Tool Room




* Biggest Tool Room In Hardware Industry. Over 150 R&D, tool room staff to take care of in house tooling.

PACKAGING DEPARTMENT



* Inhouse packing of Skin, Bag, Tag & Clam packings

PLATING DEPARTMENT

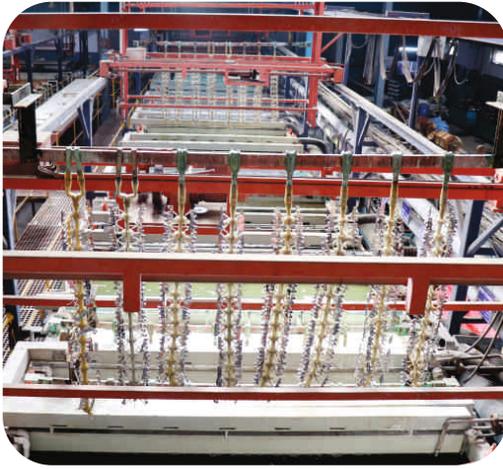

* Automatic plating plants to ensure highest plating quality.

WAREHOUSE DEPARTMENT



* OVER 1,00,000 Sq ft Warehousing & Stock holding area

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

TEST CERTIFICATE
Lab No: 1610/2018/027-2 Date: 20/09/2018 Page 1 of 2

Requested by: M/s. P.P. GARG AND COMPANY PVT. LTD.
Project Ref: Metal Handle 21/08/2018
Nature of Sample: Casted Door Handle Sample
DP No: C/CA
Attachment: Photographs of sample

Sample Name: P
Sample Received on: 22/09/2018
Date of Completion: 28/09/2018

SALT SPRAY (FOG) TEST
Test Method: ASTM B117-2016 (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 100 hours
Observation Interval: 24 hours
Test Started on: 23/09/2018 at 05:00 pm
Test Completed on: 27/09/2018 at 05:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 400 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST SUMMARY
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 400 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 05:00 pm
Test Completed on: 06/05/2018 at 01:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 400 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 840 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 5:00 pm
Test Completed on: 24/05/2018 at 1:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 840 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 400 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 05:00 pm
Test Completed on: 06/05/2018 at 01:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 400 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST SUMMARY
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 400 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 05:00 pm
Test Completed on: 14/05/2018 at 01:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 400 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST SUMMARY
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 400 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 05:00 pm
Test Completed on: 06/05/2018 at 01:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 400 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

TEST REPORT

Title: D P Garg & Co Pvt Ltd
Zinc Lever Handle
11 inch Backplate with H10 Lever -
Evaluation to EN 1906

Report Number: WTE-18-045

On behalf of: D P Garg & Co Pvt Ltd
B - 210B
Phase - 2
Noida
201305
India

Date: 18 October 2018

White Test

WTE TEST REPORT

This report is confidential to the above client and may not be reproduced in part or in total without written permission from WTE.

WTE-18-045
D P Garg & Co Pvt Ltd Zinc Lever Handle - 11 inch Backplate with H10 Lever
Evaluation to EN 1906

Summary

Test No.	Requirement	Classification	CEN Grade
1	Check of joints and fastening elements	1	3
2	Force measurement	1	3
3	Axial strength of lock furniture or latch furniture and fitting	1	3
4	Free play	1	4
5	Spring	1	4
6	Free angular movement or misalignment	1	4
7	Torque of return mechanism (spring assisted lever handles)	1	4
8	Usability of mechanism	1	4
9	Repeat test of axial strength of lock or latch furniture and methods of force	1	3
10	Repeat test of free play measurement	1	4
11	Repeat test of measurement of free angular movement or misalignment	1	4
12	Repeat test of torque of return mechanism	1	4
13	Axial strength for safety furniture	1	N/A
14	Rotational force strength	1	N/A
15	Corrosion	1	N/A

N/A: Test not applicable for grade submitted.
N/T: Test not carried out due to design of handle.
No inferences can be made regarding performance against other requirements of this standard.

Overall EN 1906:2012 Classification attained:

Category	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
Durability																	
Mass																	
Use																	

Report authorised by:

Dr Martin White
Director

WTE TEST REPORT

REPORT ENDS

METALLURGICAL SERVICES PVT. LTD.
(An Exova Group Company)
"Metra House", A-104, 5th Mile, Outer Ring Road, Saranahalli, Bengaluru, Karnataka 560078, India
T: +91 22 2500 0240 / 41, F: +91 22 2500 1740 E: info.india@exova.com W: www.exova.com

SALT SPRAY (FOG) TEST
Test Method: ISO 9227:2017 - Neutral Salt Spray (NSS Test)

Test Solution: 5% Sodium Chloride (NaCl)
Test Temperature: 35°C
Fog Collection Volume: 1.5ml (in 1 hour)
Fog Collection pH: 6.8 pH
Specific Gravity (Solution Concentration): 1.030 g/cm³
Test Exposure Time (As per Customer): 600 hours
Observation Interval: 24 hours
Test Started on: 19/04/2018 at 5:00 pm
Test Completed on: 14/05/2018 at 1:00 pm
Observation: Not observed after 100 hours. The movement of hinges satisfactory after 600 hours.

Checked by:

EXOVA SALT SPRAY TEST REPORT

Contents	Page No.
● Din Standard Locks Family	01-16
● Escape Lock Body	17
● 3 Lever Locks	18-27
● 5 Lever Locks	28-31
● Architectural Locks	32-35
● Horizontal Locks	36
● Rim Locks	37-39
● Press Locks	40
● Spare for Locks	41-42
● Latches	43-52
● Catches	53-56
● Night Latches	57-59
● Door & Windows Accessories	60-62
● Zinc Die Cast Door Handles	63-77
● Stainless Steel Lever Handles	78-86
● Stainless Steel Escutcheon	87-88
● Stainless Steel Pull Handles	89-91
● Signage & Pictogram	92

CE EURO PROFILE SASH LOCK BODY (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1630	50X72	50	78X165	1	10	1080
LAL1631	55X72	55	83X165	1	10	1080
LAL4053	60X72	60	88X165	1	10	1080

2 M 4 1 0 F 2 B C 1 0

FEATURES:-

- Easy reversible mechanism - Push from Rear & Turn.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Dead Bolt, Brass Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL4006,LAL4030,LAL4054)

CE BATHROOM LOCK BODY DOUBLE TURN (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL4125	50X72	50	78X165	1	10	1080
LAL4131	55X72	55	83X165	1	10	1080
LAL4137	60X72	60	88X165	1	10	1080

2 M 4 1 0 F 2 B G 1 0

FEATURES:-

- Easy reversible mechanism - Push from Rear & Turn.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Dead Bolt, Brass Follower
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Single Turn (LAL4111,LAL4117)

Also Available in Single Turn Radius Corner (LAL4112,LAL4118)

Also Available in Double Turn Radius Corner (LAL4126,LAL4132,LAL4138)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE LATCH ONLY IN SASH LOCK BODY (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL4011	50X72	50	78X165	1	10	1080
LAL4035	55X72	55	83X165	1	10	1080
LAL4059	60X72	60	88X165	1	10	1080

2 M 4 1 0 F - B C 1 0

FEATURES:-

- Easy reversible mechanism - Push from Rear & Turn.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with Rebate Set LAA1235, LAA1240, LAA1245.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL4012,LAL4036,LAL4060)

CE EURO PROFILE DEAD LOCK ONLY IN SASH LOCK BODY (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL4017	50X72	50	78X165	1	10	1080
LAL4041	55X72	55	83X165	1	10	1080
LAL4065	60X72	60	88X165	1	10	1080

2 M 4 1 0 F 2 B C 0 0

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with Rebate Set LAA1235, LAA1240, LAA1245.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL4018,LAL4042,LAL4066)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE LOCK BODY SINGLE THROW (72MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1630	55X72	55	83X165	1	10	1080
LAL1631	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1632,LAL1633)

CE EURO PROFILE LOCK BODY DOUBLE THROW (72MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1679	50X72	50	78X165	1	10	1080
LAL1661	55X72	55	83X165	1	10	1080
LAL1662	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1680,LAL1663,LAL1664)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE LATCH ONLY IN LOCK BODY (72MM CENTRE)



Certification awaited
Currently in testing at Exova

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1683	50X72	50	78X165	1	10	1080
LAL1644	55X72	55	83X165	1	10	1080
LAL1645	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set .

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1684,LAL1646,LAL1647)

CE EURO PROFILE DEAD ONLY IN LOCK BODY SINGLE THROW (72 MM CENTRE)



Certification awaited
Currently in testing at Exova

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1648	55X72	55	83X165	1	10	1080
LAL1649	60X72	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Brass Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1650,LAL1651)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE DEAD ONLY LOCK BODY DOUBLE THROW (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1685	50X72	50	78X165	1	10	1080
LAL1675	55X72	55	83X165	1	10	1080
LAL1676	60X72	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Brass Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1686,LAL1677,LAL1678)

CE BATHROOM LOCK BODY (78MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1625	60X78	60	88X165	1	10	1080
LAL1626	60X78	60	88X165	1	10	1080
LAL1627	60X78	60	88X165	1	10	1080
LAL1628	60X78	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Brass Follower.
- Available with bolt through provision for 38 to 42 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- LAL1625 Single Throw Variant, LAL1626 Single Throw Radius Corner Variant, LAL1627 Double Throw Variant, LAL1628 Double Throw Radius Corner Variant
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

* Note : All Backset, Centre Distance in MM



CE EURO PROFILE LOCK BODY SINGLE THROW (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1699	55X72	55	83X165	1	10	1080
LAL1700	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: **SATIN, POLISHED**

Also Available In Radius Corner (LAL1701,LAL1702)

CE EURO PROFILE LOCK BODY DOUBLE THROW (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1687	50X72	50	78X165	1	10	1080
LAL1703	55X72	55	83X165	1	10	1080
LAL1704	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: **SATIN, POLISHED**

Also Available In Radius Corner (LAL1688,LAL1705,LAL1706)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE LATCH ONLY IN LOCK BODY (72MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1691	50X72	50	78X165	1	10	1080
LAL1715	55X72	55	83X165	1	10	1080
LAL1716	60X72	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set .

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1692,LAL1717,LAL1718)

CE EURO PROFILE DEAD ONLY IN LOCK BODY SINGLE THROW (72 MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1719	55X72	55	83X165	1	10	1080
LAL1720	60X72	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1721,LAL1722)

* Note : All Backset, Centre Distance in MM

CE EURO PROFILE DEAD ONLY IN LOCK BODY DOUBLE THROW (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1693	50X72	50	78X165	1	10	1080
LAL1723	55X72	55	83X165	1	10	1080
LAL1724	60X72	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1694,LAL1725,LAL1726)

CE BATHROOM LOCK BODY (78MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1625	60X78	60	88X165	1	10	1080
LAL1626	60X78	60	88X165	1	10	1080
LAL1627	60X78	60	88X165	1	10	1080
LAL1628	60X78	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 42 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- LAL1625 Single Throw Variant, LAL1626 Single Throw Radius Corner Variant, LAL1627 Double Throw Variant, LAL1628 Double Throw Radius Corner Variant
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

* Note : All Backset, Centre Distance in MM

EURO PROFILE LOCK BODY SINGLE THROW (85MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5637	55X85	55	83X165	1	10	1080
LAL5638	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5641,LAL5642)

EURO PROFILE LOCK BODY DOUBLE THROW (85MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5601	50X85	50	78X165	1	10	1080
LAL5602	55X85	55	83X165	1	10	1080
LAL5603	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5610,LAL5611,LAL5612)

* Note : All Backset, Centre Distance in MM

EURO PROFILE LATCH ONLY LOCK IN BODY (85MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5604	50X85	50	78X165	1	10	1080
LAL5605	55X85	55	83X165	1	10	1080
LAL5606	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED
Also Available In Radius Corner (LAL5613,LAL5614,LAL5615)

EURO PROFILE DEAD ONLY IN LOCK BODY SINGLE THROW (85MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5639	55X85	55	83X165	1	10	1080
LAL5640	60X85	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Brass Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED
Also Available In Radius Corner (LAL5643,LAL5644)

* Note : All Backset, Centre Distance in MM

EURO PROFILE DEAD ONLY IN LOCK BODY DOUBLE THROW (85MM CENTRE)



**Certification awaited
Currently in testing at Exova**

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5607	50X85	50	78X165	1	10	1080
LAL5608	55X85	55	83X165	1	10	1080
LAL5609	60X85	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Brass Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5616,LAL5617,LAL5618)

EURO PROFILE LOCK BODY (85MM CENTRE)



12209:2003

1634-1

CF 5531

CE

FIRE TESTED

FD-20/30/60/90/120

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL3008	45X85	45	70X170	1	10	1080
LAL3009	50X85	50	75X170	1	10	1080
LAL3010	55X85	55	80X170	1	10	1080
LAL3011	60X85	60	85X170	1	10	1080

2 M 4 1 0 F 2 B C 1 0

FEATURES:-

- Easily reversible mechanism by moving Snib on body up, turning live bolt as suitable and pushing it back.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Brass Follower.
- Available with bolt through provision for 38 to 42 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

* Note : All Backset, Centre Distance in MM



EURO PROFILE LATCH ONLY IN LOCK BODY (85MM CENTRE)



EN
12209:2003

EN
1634-1

CF 5531

CE

FIRE TESTED
FD-20/30/60/90/120

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL3020	45X85	45	70X170	1	10	1080
LAL3021	50X85	50	75X170	1	10	1080
LAL3022	55X85	55	80X170	1	10	1080
LAL3023	60X85	60	85X170	1	10	1080

2	M	4	1	O	F	-	B	C	1	O
---	---	---	---	---	---	---	---	---	---	---

FEATURES:-

- Easily reversible mechanism by moving Snib on body up, turning live bolt as suitable and pushing it back.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner
(LAL3056,LAL3057,LAL3058,LAL3059)

EURO PROFILE DEAD ONLY IN LOCK BODY (85MM CENTRE)



EN
12209:2003

EN
1634-1

CF 5531

CE

FIRE TESTED
FD-20/30/60/90/120

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL3032	45X85	45	70X170	1	10	1080
LAL3033	50X85	50	75X170	1	10	1080
LAL3034	55X85	55	80X170	1	10	1080
LAL3035	60X85	60	85X170	1	10	1080

2	M	4	1	O	F	2	B	C	O	O
---	---	---	---	---	---	---	---	---	---	---

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner
(LAL3068,LAL3069,LAL3070,LAL3071)

* Note : All Backset, Centre Distance in MM

EURO PROFILE LOCK BODY SINGLE THROW (85MM CENTRE)



COMING SOON
Under Testing

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5645	55X85	55	83X165	1	10	1080
LAL5646	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5649,LAL5650)

EURO PROFILE LOCK BODY DOUBLE THROW (85MM CENTRE)



COMING SOON
Under Testing

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5619	50X85	50	78X165	1	10	1080
LAL5620	55X85	55	83X165	1	10	1080
LAL5621	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.
- Available as latch only and dead lock only variants.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5628,LAL5629,LAL5630)

* Note : All Backset, Centre Distance in MM

EURO PROFILE LATCH ONLY IN LOCK BODY (85MM CENTRE)



COMING SOON
Under Testing

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5622	50X85	50	78X165	1	10	1080
LAL5623	55X85	55	83X165	1	10	1080
LAL5624	60X85	60	88X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Zinc Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED
Also Available In Radius Corner (LAL5631,LAL5632,LAL5633)

EURO PROFILE DEAD ONLY IN LOCK BODY SINGLE THROW (85MM CENTRE)



COMING SOON
Under Testing

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5647	55X85	55	83X165	1	10	1080
LAL5648	60X85	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED
Also Available In Radius Corner (LAL5651,LAL5652)

* Note : All Backset, Centre Distance in MM

EURO PROFILE DEAD ONLY IN LOCK BODY DOUBLE THROW (85MM CENTRE)



COMING SOON
Under Testing

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5625	50X85	50	78X165	1	10	1080
LAL5626	55X85	55	83X165	1	10	1080
LAL5627	60X85	60	88X165	1	10	1080

FEATURES:-

- Strike Plate & Face Plate Stainless Steel.
- Zinc Dead Bolt
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Dead Bolt tested for 50,000 Cycles.
- Turn for 5mm Square Snib.
- Compatible with LAA1235, LAA1240, LAA1245 Rebate Set.

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL5634,LAL5635,LAL5636)

REBATE SET FOR DIN LOCKS



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1235	13mm	273	28	13	10	100
LAA1240	19mm	273	28	29	10	100
LAA1245	23mm	273	28	25	10	100

FEATURES:-

- Zinc Cast body.
- Suitable for all DIN Locks mentioned except European Locks and Escape Lock.

NIGHT LATCH (85 MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1738	50X85	50	75X170	1	10	1080
LAL1739	55X85	55	80X170	1	10	1080
LAL1740	60X85	60	85X170	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Operation: Latch operated by Euro Cylinders and Lever Handle

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1744,LAL1745,LAL1746)

NIGHT LATCH (72MM CENTRE)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1735	50X72	50	75X170	1	10	1080
LAL1736	55X72	55	80X170	1	10	1080
LAL1737	60X72	60	85X170	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles
- Operation: Latch operated by Euro Cylinders and Lever Handle

Finish Available: SATIN, POLISHED

Also Available In Radius Corner (LAL1741,LAL1742,LAL1743)

* Note : All Backset, Centre Distance in MM



ESCAPE LOCK BODY



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL4083	60X72	60	90X165	1	10	1080

FEATURES:-

- Easily reversible mechanism by turning live bolt suitable for inside / outward & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Brass Dead Bolt, Brass Follower.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Live Bolt Tested for 100,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Cylinders.

Finish Available: EB, NP

Also Available in Radius Corner (LAL4084)

LEVER HANDLES COMPATIBLE WITH ESCAPE LOCK BODY



CE 3 LEVER MORTISE SASH LOCK (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1449	2"	31	51X102	57	1	10	2280
LAL1450	2.5"	45	65X102	57	1	10	2190
LAL1451	3"	58	78X102	57	1	10	1980

1 M 4 1 O F 2 K D 1 A

FEATURES:-

- Over 100 Key differs
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key
- MS Striker Plate & Face Plate
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Also Available In Radius Corner (LAL1453-2", LAL1454-2.5" & LAL1455-3")

CE 3 LEVER DEAD LOCK (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1434	2.5"	45	65X70	1	10	2640
LAL1435	3"	58	78X70	1	10	2070

1 M 4 1 O F 2 K D O A

FEATURES:-

- Over 100 Key Differs
- Zinc Dead Bolt & Key
- MS Striker Plate & Face Plate
- Dead Bolt for 50,000 cycles.
- Operation : Deadbolt operated by key.
- Compatible with LAA0020, LAA1233, LAA1237, LAA1242 Rebate Set.

Also Available In Radius Corner (LAL1436-2.5", LAL1437-3")

* Note : All Backset, Centre Distance in MM

CE BATHROOM LOCK (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1422	2.5"	45	65X102	57	1	10	1980
LAL1423	3"	58	78X102	57	1	10	1770

1 M 4 1 O F 2 K D 1 A

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt
- MS Striker Plate & Face Plate
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Followers : Latch 8mm for use with sprung lever furniture.
- Dead bolt 5mm for use with bathroom furniture/emergency release.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Also Available In Radius Corner (LAL1425-2.5" & LAL1426-3")

3 LEVER MORTICE SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1200	2.5"	44	64X102	57	10	40	1560
LAL1201	3"	57	77X102	57	10	40	1120

FEATURES:-

- Over 100 Key differs
- Easy bolt reversible mechanism i.e. pull out live bolt rotate & release to change from inside opening to out side opening.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key
- MS Striker Plate & Face Plate
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1206-2.5" & LAL1207-3")



3 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC1220	2.5"	44	64X70	10	40	1560
LAC1221	3"	57	77X70	10	40	1120

FEATURES:-

- Over 100 Key differs.
- Zinc dead bolt & Key.
- Mild Steel Striker Plate & Face Plate.
- Dead Bolt tested for 50,000 cycles.
- Complete with 32mm escutcheon.
- Compatible with LAA0020, LAA1233, LAA1237, LAA1242 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1224-2.5" & LAL1225-3")

BATHROOM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1210	2.5"	44	64X102	57	10	40	1560
LAL1211	3"	57	77X102	57	10	40	1120

FEATURES:-

- Easy bolt reversible mechanism i.e. pull out live bolt rotate & release to change from inside opening to out side opening.
- Zinc Live bolt, Dead bolt
- MS Striker Plate & Face Plate
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Followers : Latch 8mm, for use with sprung lever furniture.
- Dead bolt 5mm, for use with turn/emergency release.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

3 LEVER MORTICE SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1300	2.5"	46	65X102	57	1	10	2160
LAL1301	3"	58	78X102	57	1	10	1860

FEATURES:-

- Over 100 Key differs.
- Screw based reversible mechanism i.e. open the screw in live bolt & rotate to change from inside opening to out side opening & screwed back.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 30 to 38 mm bolt through centre.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

BATHROOM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1310	2.5"	46	65X102	57	1	10	2640
LAL1311	3"	58	78X102	57	1	10	2070

FEATURES:-

- Screw based reversible mechanism i.e. open the screw in live bolt & rotate to change from inside opening to out side opening & screwed back.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 30 to 38 mm bolt through centre.
- Followers : Latch 8mm, for use with sprung liver furniture.
- Dead bolt 5mm, for use with bathroom furniture turn/emergency release.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

3 LEVER MORTICE SASH LOCK



TECHNICAL DATA


ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
LAL1399	2"	31	51X102	57	10	40

FEATURES:-

- Easily Reversible by pushing live bolt in side & rotating to change from inward to outward opening.
- Over 100 Key differs.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.

Finish Available: EB, NP

REBATED MORTICE SASH LOCK

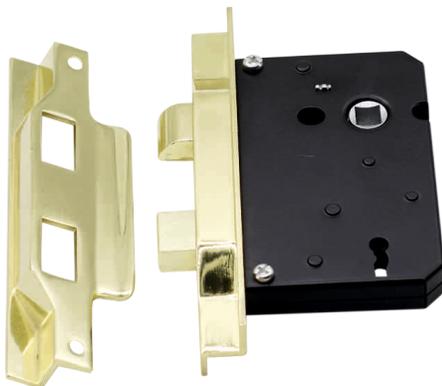

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1404	2.5"	43	65X102	57	1	10	1980
LAL1405	3"	57	78X102	57	1	10	1770

FEATURES:-

- Over 100 Key differs.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt thru provision for 36 to 38mm bolt through centre (only 3")

Finish Available: EB, NP, MB

* Note : All Backset, Centre Distance in MM

3 LEVER MORTISE SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1398	2"	31	51X102	57	10	40	1560
LAL1400	2.5"	45	65X102	57	10	40	1560
LAL1401	3"	58	78X102	57	10	40	1560
LAL1402	4"	83	103X102	57	10	40	1560

FEATURES:-

- Over 100 Key differs.
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre (only 2.5" 3" & 4")
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1444-2.5", LAL1445-3" & LAL1446-4")

BATHROOM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1410	2.5"	45	65X102	57	10	40	1560
LAL1411	3"	58	78X102	57	10	40	1560

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Followers : Latch 8mm, for use with sprung liver furniture.
- Dead bolt 5mm, for use with bathroom furniture turn/emergency release.

Finish Available: EB, NP

* Note : All Backset, Centre Distance in MM



3 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1427	2.5"	45	65X70	10	40	2160
LAL1428	3"	58	78X70	10	40	2160


FEATURES:-

- Over 100 Key differs.
- Zinc Dead bolt & Key.
- MS Striker Plate & Face Plate.
- Dead Bolt for 50,000 cycles.
- Compatible with LAA0020, LAA1233, LAA1237, LAA1242 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1429-2.5", LAL1430-3")

ARCHITECTURAL 3 LEVER LOCK

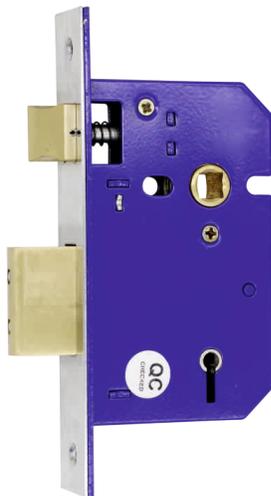

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1456	2.5"	45	65X102	57	1	10	2190
LAL1457	3"	58	78X102	57	1	10	1980

FEATURES:-

- Over 100 Key differs
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key
- MS Striker Plate & Face Plate
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

Also Available In Radius Corner (LAL1458-2.5" & LAL1459-3")

* Note : All Backset, Centre Distance in MM

ARCHITECTURAL 3 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1460	2.5"	45	65X70	1	10	2640
LAL1461	3"	58	78X70	1	10	2070

FEATURES:-

- Over 100 Key Differs
- Zinc Dead Bolt & Key
- MS Striker Plate & Face Plate
- Dead Bolt for 50,000 cycles.
- Rebate set available.
- Operation : Deadbolt operated by key.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Also Available In Radius Corner (LAL1462-2.5", LAL1463-3")

ARCHITECTURAL BATHROOM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1525	2.5"	45	65X102	57	1	10	2190
LAL1526	3"	58	78X102	57	1	10	1980

FEATURES:-

- Over 100 Key differs
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Zinc Live bolt, Dead bolt & Key
- MS Striker Plate & Face Plate
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

* Note : All Backset, Centre Distance in MM



REBATE SET FOR 3 LEVER LOCK



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA0001	13mm	162	33	14	10	100

FEATURES:-

- Mild Steel body.
- Face Plate Mild Steel
- Suitable for LAL1200 & LAL1201.

REBATE SET FOR 3 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1220	14mm	128	23.5	14	10	100

FEATURES:-

- Mild Steel body.
- Face Plate Mild Steel
- Suitable for LAL1220 & LAL1221

* Note : All Backset, Centre Distance in MM



REBATE SET FOR 3 LEVER SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1231	13mm	188	22	13	10	100
LAA1236	19mm	188	22	19	10	100
LAA1241	23mm	188	22	23	10	100

FEATURES:-

- Zinc Cast body.

REBATE SET FOR 3 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1232	13mm	155	26	13	10	100
LAA1237	19mm	155	26	19	10	100
LAA1242	23mm	155	26	23	10	100

FEATURES:-

- Zinc Cast body.

* Note : All Backset, Centre Distance in MM



BS 3621 5 LEVER SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5503	2.5"	45	67X110	57	1	10	1620
LAL5504	3"	57	79X110	57	1	10	1190

2 M 4 0 0 F 7 K D 2 B

FEATURES:-

- Over 1000 Key differs.
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 32 to 40 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Brass Live Bolt, SS Dead Bolt, Brass Follower & Brass Key.
- Box Strike Plate.
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation : Latchbolt operated by lever handles, Deadbolt operated by key.

Finish Available: SATIN, POLISHED, STAINLESS STEEL

BS 3621 5 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5505	2.5"	45	67X80	1	10	1710
LAL5506	3"	57	79X80	1	10	1600

2 M 4 0 0 F 7 K D 0 B

FEATURES:-

- Over 1000 Key differs.
- SS Dead Bolt, & Brass Key.
- Box Strike Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by key.

Finish Available: SATIN, POLISHED, STAINLESS STEEL

* Note : All Backset, Centre Distance in MM

CE 5 LEVER MORTICE SASH LOCK (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1512	2.5"	45	66X110	57	1	10	1710
LAL1513	3"	57	78X110	57	1	10	1600

2 M 4 1 0 F 3 K D 1 A

FEATURES:-

- Over 250 Key differs.
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 32 to 40 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Brass Live Bolt, Brass Dead Bolt, Brass Follower & Brass Key.
- Box Strike Plate.
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Operation : Latchbolt operated by lever handles, Deadbolt operated by key.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

Also Available In Radius Corner (LAL1514-2.5" & LAL1515-3")

Finish Available: FOREND

CE 5 LEVER DEAD LOCK



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1544	2.5"	45	66X80	1	10	2160
LAL1545	3"	57	78X80	1	10	1860

2 M 4 1 0 F 3 K D 0 A

FEATURES:-

- Over 250 Key differs.
- Follower is suitable for 8mm square spindle.
- Brass Dead Bolt & Brass Key.
- Box Strike Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by key.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Also Available In Radius Corner (LAL1546-2.5" & LAL1547-3")

Finish Available: FOREND

* Note : All Backset, Centre Distance in MM

5 LEVER MORTICE SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1500	2.5"	45	66X110	57	1	10	1710
LAL1501	3"	57	78X110	57	1	10	1600

FEATURES:-

- Over 250 Key differs.
- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt thru provision for 32 to 40mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Brass Live Bolt, Brass Dead bolt Brass Follower & Brass Key.
- Box Striker Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Operation : Latchbolt operated by lever handles, Deadbolt operated by key.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

Finish Available: EB, NP, FOREND

Also Available In Radius Corner (LAL1502-2.5" & LAL1503-3")

5 LEVER DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1520	2.5"	45	66X80	1	10	2160
LAL1521	3"	57	78X80	1	10	1860

FEATURES:-

- Over 250 Key differs.
- Follower is suitable for 8mm square spindle.
- Brass Dead Bolt & Brass Key.
- Box Striker Plate.
- Live bolt tested for 100,000 Cycles.
- Operation : Deadbolt operated by key.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Finish Available: EB, NP, FOREND

Also Available In Radius Corner (LAL1522-2.5" & LAL1523-3")

* Note : All Backset, Centre Distance in MM

REBATE SET FOR 5 LEVER SASH LOCK AND OVAL PROFILE CYLINDER LOCKS



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1233	13mm	190	28	13	10	100
LAA1238	19mm	190	28	19	10	100
LAA1243	23mm	190	28	23	10	100

FEATURES:-

- Zinc Cast body.

REBATE SET FOR 5 LEVER DEAD LOCK AND OVAL PROFILE CYLINDER LOCKS



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LAA1234	13mm	161	45	15	10	100
LAA1239	19mm	161	45	21	10	100
LAA1244	23mm	161	45	25	10	100

FEATURES:-

- Zinc Cast body.

* Note : All Backset, Centre Distance in MM

CE ARCHITECTURAL EURO PROFILE SASH LOCK CASE (FD-30/60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5009	2.5"	45	66X110	47.5	1	10	1710
LAL5010	3"	57	78X110	47.5	1	10	1600

2 M 4 1 0 F 3 K D 0 A

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Brass Live Bolt, Brass Dead Bolt, Brass Follower.
- Box Strike Plate.
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 36 to 38mm bolt through centre.
- Operation : Live Bolt Operated by Lever Handle & Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set .

Also Available In Radius Corner (LAL5011-2.5", LAL5012-3")

CE ARCHITECTURAL EURO PROFILE DEAD LOCK CASE (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5033	2.5"	45	66X80	1	10	2160
LAL5034	3"	57	78X80	1	10	1860

2 M 4 1 0 F 2 B A 0 0

FEATURES:-

- Brass Dead Bolt.
- Box Strike Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Also Available In Radius Corner (LAL5035-2.5", LAL5036-3")

* Note : All Backset, Centre Distance in MM

CE ARCHITECTURAL OVAL PROFILE SASH LOCK CASE (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5059	2.5"	45	66X110	1	10	1710
LAL5060	3"	57	78X110	1	10	1600

2 | M | 4 | 1 | 0 | F | 2 | B | A | 1 | 0

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Available with bolt through provision for 36 to 38mm bolt through center.
- Follower is suitable for 8mm square spindle.
- Brass Dead Bolt.
- Box Strike Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by Oval Profile Cylinders
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

Finish Available : EB, NP

Also Available In Radius Corner (LAL5061-2.5", LAL5062-3")

CE ARCHITECTURAL OVAL PROFILE DEAD LOCK CASE (FD-60)



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5083	2.5"	45	66X80	1	10	2160
LAL5084	3"	57	78X80	1	10	1860

2 | M | 4 | 1 | 0 | F | 2 | B | A | 0 | 0

FEATURES:-

- Brass Dead Bolt.
- Box Strike Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by Oval Cylinders.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Also Available In Radius Corner (LAL5085-2.5", LAL5086-3")

* Note : All Backset, Centre Distance in MM

ARCHITECTURAL EURO PROFILE SASH LOCK CASE



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5001	2.5"	45	66X110	1	10	1710
LAL5002	3"	57	78X110	1	10	1600

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Brass Dead Bolt, Brass Follower.
- Box Striker Plate.
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 36 to 38mm bolt through centre.
- Operation : Live Bolt Operated by Lever Handle & Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA1233, LAA1238, LAA1243 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL5003-2.5" & LAL5004-3")

ARCHITECTURAL EURO PROFILE DEAD LOCK CASE



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5026	2.5"	45	66X80	1	10	2160
LAL5027	3"	57	78X80	1	10	1860

FEATURES:-

- Follower is suitable for 8mm square spindle.
- Brass Dead Bolt.
- Box Striker Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA1234, LAA1239, LAA1244 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL5028-2.5" & LAL5029-3")

* Note : All Backset, Centre Distance in MM

EURO PROFILE SASH LOCK BODY



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1727	2.5"	45	65X102	47.5	10	40	1560
LAL1728	3"	58	78X102	47.5	10	40	1120

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Zinc Live Bolt, Zinc Dead Bolt, Zinc Follower.
- MS Striker Plate & Face Plate.
- Live bolt tested for 200,000 Cycles & Dead Bolt for 50,000 cycles.
- Available with bolt through provision for 36 to 38mm bolt through centre.
- Operation : Live Bolt Operated by Lever Handle & Deadbolt operated by Euro Profile Cylinders.
- Compatible with LAA0001, LAA1231, LAA1236, LAA1241 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1731-2.5" & LAL1732-3")

EURO PROFILE DEAD LOCK BODY



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1729	2.5"	45	65X70	10	40	1710
LAL1730	3"	58	78X70	10	40	1600

FEATURES:-

- Zinc Dead Bolt.
- MS Striker Plate & Face Plate.
- Dead Bolt tested for 50,000 Cycles.
- Operation : Deadbolt operated by Euro Profile Cylinders.
- Cylinder not included, please order separately.
- Compatible with LAA0020, LAA1233, LAA1237, LAA1242 Rebate Set.

Finish Available: EB, NP

Also Available In Radius Corner (LAL1733-2.5" & LAL1734-3")

* Note : All Backset, Centre Distance in MM



HORIZONTAL SASH LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1406	6"	50	70X148	76	1	10	1080

FEATURES:-

- Over 100 Key differs
- Available with bolt through provision for 32 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Brass Live bolt, Dead bolt & Zinc Key
- MS Striker Plate & Face Plate
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.

Finish Available: EB, NP

HORIZONTAL BATHROOM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL5240	6"	50	70X148	76	1	10	1080

FEATURES:-

- Available with bolt through provision for 32 to 38 mm bolt through centre.
- Follower is suitable for 8mm square spindle.
- Brass Live bolt, Dead bolt
- MS Striker Plate & Face Plate
- Live bolt tested for 100,000 Cycles & Dead Bolt for 50,000 cycles.

Finish Available: EB, NP

* Note : All Backset, Centre Distance in MM



FLUTED RIM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	KEY BACKSET	HANDLE BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1031	6"X4"	43	105	143X83	1	10	1500

FEATURES:-

- 2 Lever, 2 bolt rim lock.
- 2 Keys included.
- Mild Steel Body.
- Zinc Live Bolt, Dead Bolt & Follower.
- 12 Key Differs.
- Complete with screws.

Finish Available: EXB, EXG, GRN, CP, EB, SNP, SCP
Also Available In Brass Metal Body.

NARROW STYLE RIM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	KEY BACKSET	HANDLE BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1021	5.1/2"X3"	43	106	143X83	1	10	1500

FEATURES:-

- 2 Bolt rim lock.
- 2 Keys included.
- 8mm follower.
- Mild Steel Body.
- Zinc Live Bolt, Dead Bolt & Follower.
- Complete with screws.
- 12 Key Differs

Finish Available: EXB, EXG, GRN, CP, EB, SNP, SCP

* Note : All Backset, Centre Distance in MM



RIM DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1011	4"x3"	43	106X83	1	10	1750

FEATURES:-

- 1 bolt rim dead lock
- 2 keys included
- To suit doors 35-54 mm thick
- Mild steel body
- Zinc Dead Bolt
- 12 Key Differs
- Complete with screws.

Finish Available: EXB, EXG, GRN, CP, EB, SNP, SCP

RIM LATCH WITH LOCKING SNIB



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1001	4"	76	106X83	1	10	1750

FEATURES:-

- Rim latch with a case depth of 100mm and snib function.
- 8mm follower.
- Mild steel body.
- Zinc Live Bolt, Bolt & Snib.
- Complete with screws.

Finish Available: EXB, EXG, GRN, CP, EB, SNP, SCP

* Note : All Backset, Centre Distance in MM



RIM SLIM DEAD LOCK



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1012	4"X3"	48	103X70	1	10	1750

FEATURES:-

- 1 bolt rim dead lock.
- 2 Keys included.
- To suit doors 35-54mm thick.
- Mild Steel Body.
- Zinc Live Bolt.
- 12 Key Differs.
- Complete with screws.

Finish Available: EXB, EXG

SCOTCH SPRING RIM LOCK



TECHNICAL DATA

ITEM CODE	SIZE	KEY BACKSET	HANDLE BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1023	6"X4"	55	117	106X153	.	.	.

FEATURES:-

- 2 keys included
- 8mm follower
- Mild Steel Body
- Zinc Live Bolt, Dead Bolt & Follower
- Complete with screws.
- Available as handed variants.

Finish Available: EXB, EXG, GRN

* Note : All Backset, Centre Distance in MM

PRESS LOCK C/W 1 KEY



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1000	3"	76	100	10	100	2400
LAL1004	4"	100	100	10	50	2000
LAL1005	5"	125	100	10	50	2000

Finish Available: EXB
 Also Available LAL 1003-3" with Long Key.

CONTRACT PRESS LOCK C/W 1 KEY



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1006 (Contract)	63MM	70	90	10	100	2400

Finish Available: EXB

* Note : All Backset, Centre Distance in MM



SPARE FOR LOCK



3 Lever Lock Key



5 Lever Lock Key



Rim Lock Key



Press Lock Key



Rack Bolt Key

SPARE FOR BS 5 LEVER LOCK



Face Plate / Strike Plate
5 Lever Dead Lock



Face Plate / Strike Plate
5 Lever Sash Lock



SPARE FOR EURO PROFILE LOCKS



Face Plate / Strike Plate
Euro Profile Dead Lock



Face Plate / Strike Plate
Euro Profile Sash Lock

SPARE FOR 3 LEVER LOCKS



Face Plate / Strike Plate
3 Lever Dead Lock



Face Plate / Strike Plate
3 Lever Sash Lock



Face Plate / Strike Plate
3 Lever Bathroom Lock



Strike Plate
MPB 15

SPARE FOR TUBULAR LATCHES



Face Plate / Strike Plate
Tubular Dead Bolt



Face Plate / Strike Plate
Tubular Arch.

TUBULAR LATCH - CE CERTIFIED



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0071	2.5"	45	67X22	10	100	6000
LAL0072	3"	57	79X22	10	100	6000
LAL0073	4"	82	104X22	10	100	6000
LAL0074	5"	107	129X22	5	80	

NPD M 4 1 0 F - B O 1 0

FEATURES:-

- Suitable for 200,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & M S Body.
- Follower suitable for 8mm square spindle
- Suitable for internal doors.
- To be used with Sprung furniture.
- Rebate set available.

Finish Available: CP, SCP, SNP, EXB

Also Available In Radius Corner (LAL0076 - 2.5", LAL0077 - 3", LAL0078 - 4", LAL0079 - 5")

TUBULAR LATCH (BOLT THROUGH) - CE CERTIFIED



12209:2003



1634-1



CF 5531



CE



FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0081	2.5"	45	67X20	10	100	2400
LAL0082	3"	57	79X20	10	100	2400
LAL0083	4"	83	104X22	10	100	2400
LAL0084	5"	107	129X22	5	80	2400

NPD M 4 1 0 F - B O 1 0

FEATURES:-

- Suitable for 200,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Two piece faceplate assembly.
- Follower suitable for 8mm square spindle
- Suitable for internal doors.
- To be used with Sprung furniture.
- Suitable for bolt through fixing of 32-38mm.

Finish Available: CP, SCP, SNP, EXB

Also Available In Radius Corner (LAL0086 - 2.5", LAL0087 - 3", LAL0088 - 4", LAL0089 - 5")

* Note : All Backset in MM

STANDARD TUBULAR LATCH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0001	2.5"	45	67X20	10	100	6000
LAL0002	3"	57	79X20	10	100	6000

FEATURES:-

- Suitable for 100,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Follower is suitable for 8mm square spindle.
- Suitable for internal doors.
- To be used with Sprung door furniture.
- Rebate set available (LAA0010)

Finish Available : EB, NP

Also Available in Radius Corner (LAL0006-2.5" & LAL0007-3")

TUBULAR LATCH (BOLT THROUGH)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0011	2.5"	45	67X20	10	100	6000
LAL0012	3"	57	79X20	10	100	6000

FEATURES:-

- Suitable for 80,000 Cycles.
- Zinc Live Bolt, Zinc Follower, MS Faceplate, MS Striker Plate & MS Body.
- Two piece, faceplate assembly.
- Follower suitable for 8mm square spindle.
- Suitable for light door furniture.
- To be used with Sprung door furniture.
- Suitable for bolt through fixing of 32-38mm
- Can be used with Rebate set.
- Rebate set available (LAA0010)

Finish Available: EB, NP

Also Available in Radius Corner (LAL0016-2.5" & LAL0017-3")

* Note : All Backset in MM

TUBULAR LATCH (BOLT THROUGH)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0041	2.5"	45	67X20	10	100	6000
LAL0042	3"	57	79X20	10	100	6000

FEATURES:-

- Suitable for 100,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Follower is suitable for 8mm square spindle
- Suitable for light doors.
- Sprung furniture.
- Suitable for bolt through 32-38mm center.
- Can be used with Rebate Set.
- Tolerance : ±2mm

Finish Available: EB / NP

Also Available In Radius Corner (LAL0046 - 2.5" & LAL0047 - 3")

BUDGET TUBULAR LATCH (BOLT THROUGH)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0054	2.5"	45	67X20	10	100	6000
LAL0055	3"	57	79X20	10	100	6000


FEATURES:-

- Suitable for 50,000 Cycles.
- Zinc Live Bolt, Nylon follower, MS Faceplate, MS Striker plate & M S Body.
- Follower is suitable for 8mm square spindle
- Suitable for light doors.
- Sprung furniture.
- Suitable for bolt through 32-38mm center.
- Can be used with Rebate Set.

Finish Available: EB / NP

* Note : All Backset in MM

TUBULAR LATCH (BOLT THROUGH) WITH REMOVABLE FACE PLATE

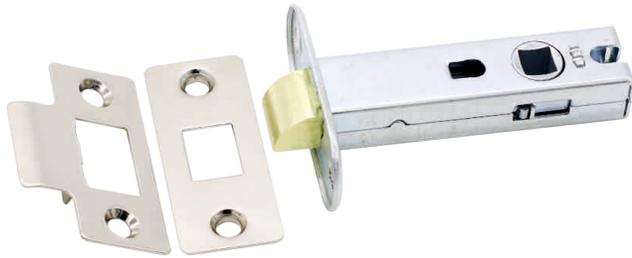

TECHNICAL DATA


ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0031	2.5"	45	67X20	10	100	6000
LAL0032	3"	57	79X20	10	100	6000

FEATURES:-

- Suitable for 100,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & M S Body.
- Two piece faceplate assembly.
- Available with removable face plate to help reduce inventory.
- Follower is suitable for 8mm square spindle
- Suitable for light doors.
- Sprung furniture.
- Suitable for bolt through 32-38mm centre.
- Can be used with Rebate Set.

Finish Available: EXB, NP, EB, CP, SCP, SNP

TUBULAR LATCH (BOLT THROUGH) WITH TWO SET OF REMOVABLE FACE PLATE

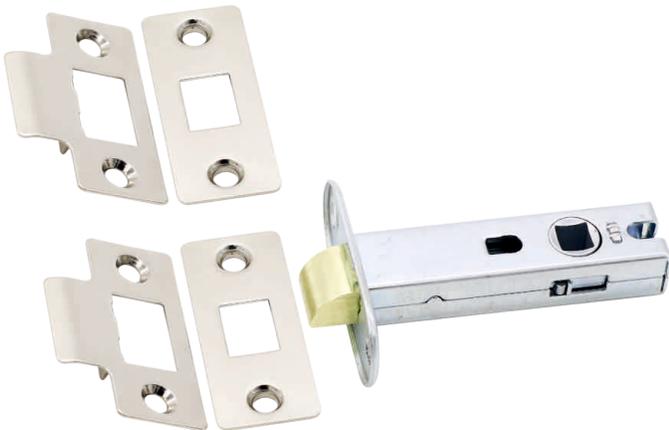

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0998	2.5"	45	67X20	10	100	6000
LAL0999	3"	57	79X20	10	100	6000


FEATURES:-

- Suitable for 100,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & M S Body.
- Two piece faceplate assembly.
- Available with removable face plate to help reduce inventory.
- Follower is suitable for 8mm square spindle
- Suitable for light doors.
- Sprung furniture.
- Suitable for bolt through 32-38mm centre.
- Supplied with two sets of faceplate, Striker Plate & Screws.

Finish Available: As per required

* Note : All Backset in MM

ARCHITECTURAL TUBULAR LATCH - CE CERTIFIED

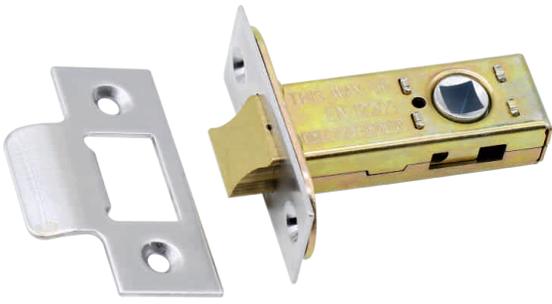

-
- 12209:2003
-
- 1634-1
-
- CF 5531
-
- CE
-
- FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER
LAL0131	2.5"	45	65X23	10	100
LAL0132	3"	57	78X23	10	100
LAL0133	4"	82	103X23	10	100
LAL0134	5"	107	128X23	5	80

1 | M | 4 | 1 | O | F | - | B | O | 1 | O

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Suitable for 200,000 Cycles.
- Brass Live bolt, Zinc follower, MS Faceplate, MS Striker Plate & MS Body.
- Dual set of Face plate, Striker Plate & Fixing screws.
- Follower is suitable for 8mm square spindle.

Finish Available : As per required

Also Available In Radius Corner (LAL0141 - 2.5", LAL0142 - 3", LAL0143- 4" & LAL0144 - 5")

Also Available in Forend and Striker Plates Pack (LAA0137, LAA0138 and LAA0139)

ARCHITECTURAL (H/D) TUBULAR LATCH BOLT THROUGH - CE CERTIFIED



-
- 12209:2003
-
- 1634-1
-
- CF 5531
-
- CE
-
- FIRE TESTED
FD-20/30/60

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER
LAL0137	3"	57	78X23	10	100
LAL0138	4"	82	103X23	10	100
LAL0139	5"	107	128X23	10	80

1 | M | 4 | 1 | O | F | - | B | O | 1 | O

FEATURES:-

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Suitable for 200,000 Cycles.
- Brass Live bolt, Zinc follower, MS Faceplate, MS Striker Plate & MS Body.
- Dual set of Face plate, Striker Plate & Fixing screws.
- Follower is suitable for 8mm square spindle.
- Suitable for bolt through 32-38mm center.

Finish Available: As per required

Also Available In Radius Corner (LAL0147 - 3", LAL0148 - 4" & LAL0149 - 5")

Also Available in Forend and Striker Plates Pack (LAA0137, LAA0138 and LAA0139)

* Note : All Backset in MM

ARCHITECTURAL TUBULAR LATCH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0101	2.5"	45	65X23	10	100	2400
LAL0102	3"	57	78X23	10	100	2400
LAL0103	4"	82	103X23	10	100	2400
LAL0104	5"	107	128X23	10	80	1920

FEATURES:-

- Suitable for 150,000 Cycles.
- Brass Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Dual set of Face Plate, Striker Plate & Fixing screws.
- Follower is suitable for 8mm square spindle.

Finish Available: As per required

Also Available in Radius Corner (LAL0121 - 2.5", LAL0122 - 3", LAL0123 - 4" & LAL0124 - 5")

ARCHITECTURAL TUBULAR LATCH BOLT THROUGH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0111	3"	57	78X23	10	100	2400
LAL0112	4"	82	103X23	10	100	2400
LAL0113	5"	107	128X23	10	80	1920

FEATURES:-

- Suitable for 150,000 cycles.
- Brass Live bolt, Zinc follower, MS Faceplate, MS Striker Plate & MS Body.
- Dual set of Face plate, Striker Plate & Fixing screws.
- Follower is suitable for 8mm square spindle.
- Suitable for bolt through 32-38mm center.

Finish Available: As per required

NOTE: 2.5" Size is not available in Bolt Through model.

* Note : All Backset in MM

ROUND TUBULAR LATCH BOLT (EASY LATCH)



TECHNICAL DATA


ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0251	2.5"	45	67X20	10	100	6000
LAL0252	3"	57	77X20	10	100	6000

FEATURES:-

- Suitable for 100,000 Cycles.
- Zinc Live Bolt, Zinc follower, Zinc Faceplate, Aluminum Striker plate
- Follower is suitable for 8mm square spindle
- Suitable for light doors.
- Sprung furniture.
- Suitable for bolt through 32-38mm centre.

Finish Available: EB, NP, SNP, CP

ROUND TUBULAR DEAD BOLT

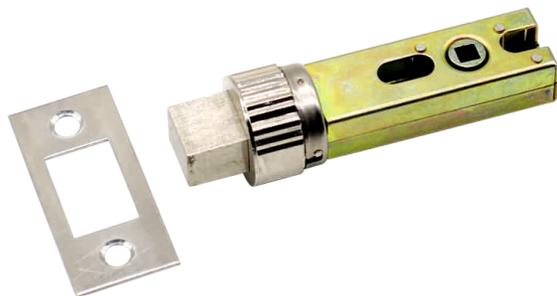

TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0261	2.5"	45	58X20	10	100	6000
LAL0262	3"	57	70X20	10	100	6000

FEATURES:-

- Suitable for 50,000 Cycles.
- Zinc Dead Bolt, Zinc follower, Zinc Faceplate, Aluminum Striker plate
- Follower is suitable for 5mm square spindle
- Suitable for bolt through 32-38mm centre.

Finish Available: EB, NP, SNP, CPS

* Note : All Backset in MM

TUBULAR DEAD BOLT - PROPOSED CE, CERTIFIRE

COMING SOON
Under Testing



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER
LAL0275	2.5"	45	65X23	10	100
LAL0276	3"	57	78X23	10	100
LAL0277	4"	82	103X23	10	100
LAL0278	5"	107	179X23	10	80

FEATURES:-

- Suitable for 50,000 Cycles.
- Brass Dead Bolt, Zinc follower, MS Faceplate, MS Striker Plate & MS Body.
- Follower is suitable for 5mm square spindle.
- Suitable for bolt through fixing 32-38mm.

Finish Available: EB, NP

Also Available In Radius Corner (LAL0280-2.5", LAL0281-3", LAL0282-4", LAL0283-5")

TUBULAR DEAD BOLT



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER
LAL0904	2.5"	45	65X23	10	100
LAL0905	3"	57	78X23	10	100
LAL0906	4"	82	103X23	10	100
LAL0907	5"	107	179X23	10	80

FEATURES:-

- Suitable for 50,000 Cycles.
- Zinc Dead Bolt, Zinc follower, MS Faceplate, MS Striker Plate & MS Body.
- Follower is suitable for 5mm square spindle.
- Suitable for bolt through fixing 32-38mm.

Finish Available: EB, NP

Also Available in Forend and Striker Plates Pack (LAA0904, LAA095, LAA 0906 and LAA0139)

Also Available In Radius Corner (LAL0908-2.5", LAL0909-3", LAL0910-4", LAL0911-5")

* Note : All Backset in MM

MAGNETIC LATCH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0067	3"	57	77X23	10	100	2400

FEATURES:-

- Follower is suitable for 8mm square spindle.
- Suitable for bolt through 32-38 mm centre.

Finish Available:

REBATED TUBULAR LATCH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0008	2.5"	45	67X20	10	100	2400
LAL0009	3"	57	79X20	10	100	2400

FEATURES:-

- Follower is suitable for 8mm square spindle.
- Suitable for bolt through 32-38 mm centre.

Finish Available:

REBATE SET FOR TUBULAR LATCH



TECHNICAL DATA

ITEM CODE	SIZE	LENGTH	WIDTH	PCS. IN INNER	PCS. IN OUTER
LAA0010	13mm	57	25	10	100

FEATURES:-

- Zinc body.
- Face Plate Mild Steel.
- Suitable for LAL0001, LAL0002, LAL0011 & LAL0012

* Note : All Backset in MM

FLAT MORTICE LATCH (BOLT THROUGH) - PROPOSED CE, CERTIFIRE

COMING SOON
Under Testing



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL1601	2.5"	45	65X57	1	10	2310
LAL1602	3"	57	77X57	1	10	2310
LAL1603	4"	82	102X57	1	10	1260

FEATURES:-

- Latch operated by lever handles.
- Case Mild Steel, epoxy powder coated.
- Square forend & Striker Plate
- Guided Latchbolt : Brass Self handing
- Follower 8mm brass.
- Suitable for bolt through 32-38mm center.

Finish Available: EB, NP, SNP, CP, SEB, ABR

Also Available In Radius Corner (LAL1604-3",LAL1605-4",LAL1606-5")

FLAT MORTICE LATCH (BOLT THROUGH)



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0056	2.5"	45	65X57	1	10	2310
LAL0057	3"	57	77X57	1	10	2310
LAL0058	4"	82	102X57	1	10	1260

FEATURES:-

- Latch operated by lever handles.
- Case Mild Steel, epoxy powder coated.
- Square forend & Striker Plate
- Guided Latchbolt : Brass Self handing
- Follower 8mm brass.
- Suitable for bolt through 32-38mm center.

Finish Available: EB, NP, SNP, CP, SEB, ABR

Also Available In Radius Corner (LAL0065-2.5",LAL0066-3",LAL0067-4")

* Note : All Backset in MM

BALES CATCH



TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	CASE DEPTH	DISTANCE OF CASE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0001	45	19.5	15	16	5	100	9000
LAC0002	57.5	23.5	17.5	20	5	100	9000

FEATURES:-

- Sprung ball bearing catch.
- Mild Steel Casing

Finish Available : NP, EB, SNP

MAGNETIC CATCH



TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	SCREW NO.	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0010	40	22	4	5	100	9000
LAC0011	58	22	4	5	100	5000

FEATURES:-

- Suitable for latching of doors / cabinets
- Body plastic

Finish Available : WHITE, BROWN & BLACK

* Note : All Backset in MM

SS SLIMLINE MAGNETIC CATCH



TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0015	42	12	1	100	23100
LAC0016	42	12	1	100	23100

FEATURES:-

- Body Stainless Steel
- Available In 3.2 (LAC0015), 5 Kg Capacity (LAC0016).
- Sleek Finish

Finish Available: NP, EB

DOUBLE ROLLER CATCH



TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0021	27.5	32.5	16.5	5	100	9000


FEATURES:-

- Mild Steel Body
- Nylon Rollers
- Suitable for light Shutter Doors

Finish Available : BZP, FB

* Note : All Backset in MM

ADJUSTABLE ROLLER CATCH

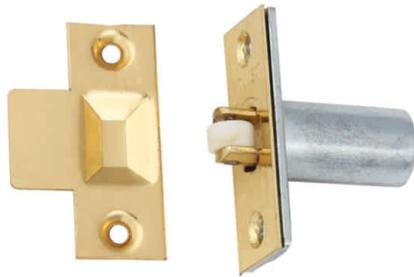

TECHNICAL DATA


ITEM CODE	LENGTH	WIDTH	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0023	39	19	10	100	9000
LAC0025	39	19	10	100	9000

FEATURES:-

- Operation : Adjustable roller bolt
- Body : Zinc (LAC0025), Nylon (LAC0023)
- Forend : Square
- Strike Plate : Square, Flat
- Duty : Full size doors, minimum thickness 32mm

Finish Available: EB, NP, SNP, SCP

ARCHITECTURAL ROLLER BOLT CATCH

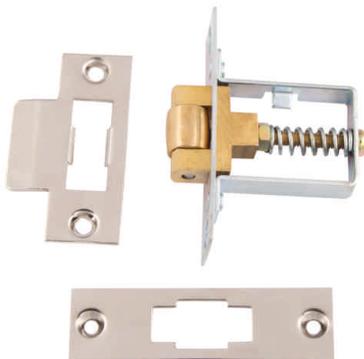

TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0026	45	33	10	100	9000


FEATURES:-

- Operation : Adjustable roller bolt action
- Frame : Steel
- Forend : Square, Stainless Steel
- Strike Plate : Square, Flat, Stainless Steel
- Duty: Full size doors, minimum thickness 30mm
- Bolt: Brass

Finish Available: EB, NP, SNP, SCP

* Note : All Backset in MM

BOX TYPE CUPBOARD CATCH

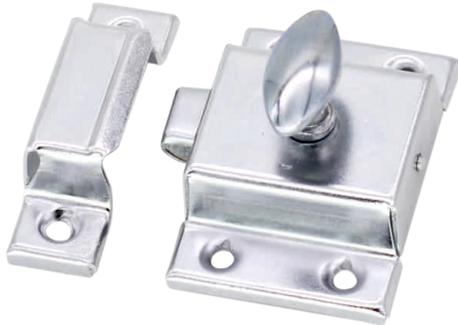

TECHNICAL DATA

ITEM CODE	LENGTH	WIDTH	HEIGHT	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAC0031	38	56	16	5	100	5000

FEATURES:-

- Mild Steel Body
- Zinc Knob

Finish Available: **EB, NP, CP, BZP, FB**

TOUCH LATCH



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALLET
LAL0080	3"	57	77X23	10	100	2400

FEATURES:-

- Push to latch and unlatch.
- For use on loft hatch doors or cupboard doors.
- Complete with all fixings.

Finish Available:

* Note : All Backset in MM



TRADITIONAL NIGHTLATCH



TECHNICAL DATA

ITEM CODE	BACKSET	PCS. IN INNER	PCS. IN OUTER
LAL9002	40	1	25
LAL9003	60	1	25

FEATURES:-

- Bolt can be held back with snib.
- Case standard only.
- 2 Brass key.
- Die cast zinc alloy body & brass latch
- Rim Cylinders available in Polished Brass (PB), Satin Chrome (SCP) & Chrome Plated (CP)

Finish Available: EB, CP, SCP, SNP, EPOXY, SILVER, WHITE

ALUMINIUM CASTED NIGHTLATCH



TECHNICAL DATA

ITEM CODE	BACKSET	PCS. IN INNER	PCS. IN OUTER
LAL9001	60	1	25

FEATURES:-

- Bolt can be held back with snib.
- Case standard only.
- Keys: 2 no. included.
- Die cast Aluminum alloy body & latch.
- Rim Cylinders available in Polished Brass (PB), Satin Chrome (SCP) & Chrome Plated (CP)

Finish Available: GREEN, OLIVE, EPOXY, SILVER

* Note : All Backset in MM



ROLLER BOLT NIGHT LATCH



TECHNICAL DATA

ITEM CODE	BACKSET	PCS. IN INNER	PCS. IN OUTER
LAL9006	60	1	25

FEATURES:-

- Roller bolt operates with simple push/pull action.
- Keys 2 no. included.
- Rim Cylinders available in Polished Brass (PB), Satin Chrome (SCP) & Chrome Plated (CP)

Finish Available: Multiple finishes available.

STANDARD STYLE NIGHT LATCH



TECHNICAL DATA

ITEM CODE	BACKSET	PCS. IN INNER	PCS. IN OUTER
LAL9004	40	1	25
LAL9005	60	1	25

FEATURES:-

- Bolt can be held back with snib.
- Keys: 2 no. included.
- Die cast zinc alloy & brass latch
- Rim Cylinders available in Polished Brass (PB), Satin Chrome (SCP) & Chrome Plated (CP)

Finish Available: Multiple finishes available.

* Note : All Backset in MM

RIM CYLINDER NIGHT LATCH



TECHNICAL DATA

ITEM CODE	BACKSET	PCS. IN INNER	PCS. IN OUTER
LAL9007	40	1	25
LAL9008	60	1	25

FEATURES:-

- Bolt can be held back with snib.
- Keys: 2 no. included.
- Die cast zinc alloy & brass latch
- Rim Cylinders available in Polished Brass (PB) & Satin Chrome (SCP)

Finish Available: Multiple finishes available.

WINDOW AND DOOR RACK BOLT



TECHNICAL DATA

ITEM CODE	SIZE	BACKSET	CASE SIZE	CASE DIA	PCS. IN INNER	PCS. IN OUTER
LAC1024 (W/O KEY)	16X42	13	42	16	10	100
LAC1015 (W/O KEY)	16X60	31	60	16	10	100
LAC1016 (W/O KEY)	16X88	59	88	16	10	100
LAC1023 (WITH KEY)	16X42	13	42	16	10	100
LAC1019 (WITH KEY)	16X60	31	60	16	10	100
LAC1020 (WITH KEY)	16X88	59	88	16	10	100

FEATURES:-

- Key Turn operated (Key not included if not ordered)
- To suit doors up to 44mm thick.
- Comprises :
 - 1 x bolt
 - 1 x strike plate
 - 1 x escutcheon
 - 1 x Key Brass (if ordered with key variant)
- Body Mild Steel

Finish Available: EB / CP / EXW

* Note : All Backset in MM

LONG THROW LOCK



TECHNICAL DATA

	ITEM CODE	SIZE	BACKSET	CASE SIZE
BSK	LAL5266	50	52.5	83X105
	LAL5268	70	52.5	83X105
OSK	LAL5265	50	52.5	83X105
	LAL5267	50	52.5	83X105

FEATURES:-

- SS 304 Grade Square Bolt
- MS Body & .
- Supplied with fixing.
- Zinc Cylinder.
- Brass Keys.

LOCKING CASEMENT STAY



GZC2021

FEATURES:-

- Zinc Cast Body

Finish Available: CP / EXW / SNP / SCP / EB / EXS / EXBR

* Note : All Backset in MM



LOCKING CASEMENT FASTENER



GZC2031

FEATURES:-

- Zinc Cast Body

Finish Available: CP / EXW / SNP / SCP / EB / EXS / EXBR

DOOR GUARD



ADSZ0001

FEATURES:-

- Zinc Cast Body

Finish Available: CP / EXW / SNP / SCP / EB / EXS / EXBR

HINGE BOLT



70010

FEATURES:-

- Mild Steel Security Bolt.

DOOR CHAIN



6300

FEATURES:-

- Mild Steel Security Bolt.





VICTORIAN STRAIGHT LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
GZC0504	LEVER LOCK	153	40	10	57	1	25
GZC0501	LEVER LATCH	118	40	9	-	1	25
GZC0514	EURO PROFILE CYL	153	40	10	47.5	1	25
GZC0513	OVAL PROFILE CYL	153	40	10	48.5	1	25
GZC0515	BATHROOM	153	40	10	57	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

VICTORIAN SCROLL LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
GZC0505	LEVER LOCK	153	40	10	57	1	25
GZC0502	LEVER LATCH	118	40	9	-	1	25
GZC0510	EURO PROFILE CYL	153	40	10	47.5	1	25
GZC0511	OVAL PROFILE CYL	153	40	10	48.5	1	25
GZC0512	BATHROOM	153	40	10	57	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

* Note : All Centre Distance in MM



SHAPED SCROLL LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
GZC1505	LEVER LOCK	170	40	9	57	1	25
GZC1502	LEVER LATCH	170	40	9	-	1	25
GZC1508	EURO PROFILE CYL	170	40	9	47.5	1	25
GZC1511	OVAL PROFILE CYL	170	40	9	48.5	1	25
GZC1510	BATHROOM	170	40	9	57	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

BERKELEY LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
LHZ03B1	LEVER LOCK	153	40	10	57	1	25
LHZ03B2	LEVER LOCK	118	40	9	-	1	25
LHZ03B3	BATAROOM	153	40	10	47.5	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

* Note : All Centre Distance in MM



ORFORD LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
GZC5505	LEVER LOCK	170	50	9.6	57	1	25
GZC5502	LEVER LATCH	170	50	9.6	-	1	25
GZC5503	EURO PROFILE CYL	170	50	9.6	47.5	1	25
GZC5504	OVAL PROFILE CYL	170	50	9.6	48.5	1	25
GZC5510	BATHROOM	170	50	9.6	57	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

CARISBROOKE LEVER HANDLE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	NAME	LENGTH	WIDTH	HEIGHT	CENTRE DISTANCE	PCS. IN INNER	PCS. IN OUTER
GZC1504	LEVER LOCK	170	50	9	57	1	25
GZC1501	LEVER LATCH	170	50	9	-	1	25
GZC1514	EURO PROFILE CYL	170	50	9	47.5	1	25
GZC1513	OVAL PROFILE CYL	170	50	9	48.5	1	25
GZC1515	BATHROOM	170	50	9	57	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- 5mm spindle also included with bathroom version.
- Material Zinc alloy.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

* Note : All Centre Distance in MM



MUNCASTER LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0041	169	47	11	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

HAYTON LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ1014	120	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



BASE LEVER HANDLE ON ROUND ROSE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ1015	125	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

OLIVIA LEVER HANDLE ON ROUND ROSE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0018	122	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



ALEXANDER LEVER HANDLE ON ROUND ROSE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0019	116	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

VICTORIAN STRAIGHT LEVER HANDLE ON ROUND ROSE



1906
Gr-3



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0020	107	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



SCROLL LEVER HANDLE ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0021	94	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

EDINBURGH LEVER HANDLE ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0023	126	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



LINDISFARNE LEVER HANDLE ON ROUND ROSE



1906 Gr-2



1634-1



100 Hours.



FIRE TESTED FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0024	140	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

RABY LEVER ON ROUND ROSE



1906 Gr-2



1634-1



100 Hours.



FIRE TESTED FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0032	125	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



DALTON LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0033	124	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

CHESTOR LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0034	132	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



BOWES LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0035	115	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

TREMATION LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0036	125	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



CORBY LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0037	118	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

LUMLEY LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
GZC0831	114	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



CORBY LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ1100	130	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

AUCKLAND LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ1025	130	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



BERKELEY LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0331	117	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

WINDSOR LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0044	107	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP



BRISTOL LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0045	103	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

BOURN LEVER ON ROUND ROSE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHZ0046	134	51	10	1	25

FEATURES:-

- Pair of lever handles on face fixing backplates.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material Zinc alloy.
- Order qty : 1 pair/1 set*.

Finish Available : NP, CP, ABR, ACB, SB, SNP, DC, BPC, WPC, IPC, PP, SP

STAINLESS STEEL RADIUS LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0001	304	135	52	10	1	25
LHC0001	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL RETURN TO DOOR LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0002	304	140	52	10	1	25
LHC0002	201	140	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL MITRED LEVER HANDLE



1906

Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0003	304	135	52	10	1	25
LHC0003	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL CURVE LEVER HANDLE



1906

Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0004	304	135	52	10	1	25
LHC0004	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0006	304	135	52	10	1	25
LHC0006	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0007	304	135	52	10	1	25
LHC0007	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL LEVER HANDLE



1906

Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0008	304	135	52	10	1	25
LHC0008	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE



1906

Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0009	304	135	52	10	1	25
LHC0009	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0011	304	135	52	10	1	25
LHC0011	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0013	304	135	52	10	1	25
LHC0013	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL LEVER HANDLE



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0014	304	135	52	10	1	25
LHC0014	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE WITH PRIVACY FUNCTION



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0102	304	135	52	10	1	25
LHC0102	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL LEVER HANDLE WITH PRIVACY FUNCTION



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0103	304	135	52	10	1	25
LHC0103	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE WITH PRIVACY FUNCTION



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0104	304	135	52	10	1	25
LHC0104	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL LEVER HANDLE (D - Ø22)



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0201	304	135	52	10	1	25
LHC0201	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS

STAINLESS STEEL LEVER HANDLE (D - Ø22)



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0202	304	135	52	10	1	25
LHC0202	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



STAINLESS STEEL LEVER HANDLE (D - Ø22)



1906
Gr-2



1634-1



100 Hours.



FIRE TESTED
FD-30/60

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGTH	ROSE DIA	HEIGHT	PCS. IN INNER	PCS. IN OUTER
LHE0204	304	135	52	10	1	25
LHC0204	201	135	52	10	1	25

FEATURES:-

- Pair of lever handles on roses.
- Sprung, for use with standard duty followers.
- To suit doors up to 44mm thick.
- 8mm square spindle included for lever operation.
- Material SS, PHE - Grade 304, PHC- Grade 201
- Grade 304 with brass spindle housing, Grade 201 With Aluminum Spindle Housing
- Supplied With All Fixings

Finish Available : SP, PSS



BLIND ESCUTCHEON



TECHNICAL DATA

ITEM CODE	SS GRADE	ROSE DIA	PCS. IN INNER	PCS. IN OUTER
LHE31BL	304	52X5mm	10	100
LHC31BL	201	52X5mm	10	100
LHE31BL	304	52X8mm	10	100
LHC31BL	201	52X8mm	10	100

FEATURES:-

- Material Stainless Steel

Finish Available: SS, PSS

EUROPROFILE ESCUTCHEON



TECHNICAL DATA

ITEM CODE	SS GRADE	ROSE DIA	PCS. IN INNER	PCS. IN OUTER
LHE31CY	304	52X5mm	10	100
LHC31CY	201	52X5mm	10	100
LHE31CY	304	52X8mm	10	100
LHC31CY	201	52X8mm	10	100

FEATURES:-

- Material Stainless Steel

Finish Available: SS, PSS



OVAL ESCUTCHEON



TECHNICAL DATA

ITEM CODE	SS GRADE	ROSE DIA	PCS. IN INNER	PCS. IN OUTER
LHE310V	304	52X5mm	10	100
LHC310V	201	52X5mm	10	100
LHE310V	304	52X8mm	10	100
LHC310V	201	52X8mm	10	100

FEATURES:-

- Material Stainless Steel

Finish Available: SS, PSS

KEYLOCK ESCUTCHEON



TECHNICAL DATA

ITEM CODE	SS GRADE	ROSE DIA	PCS. IN INNER	PCS. IN OUTER
LHE31ST	304	52X5mm	10	100
LHC31ST	201	52X5mm	10	100
LHE31ST	304	52X8mm	10	100
LHC31ST	201	52X8mm	10	100

FEATURES:-

- Material Stainless Steel

Finish Available: SS, PSS

STAINLESS STEEL RETURN TO DOOR TYPE PULL HANDLE BOLT FIX



FEATURES:-

- Material Stainless Steel.
- Single Pull Handle.
- Bolt through fixing
- To suit doors up to 55mm thick

Finish Available : SS, PSS

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGHT	DIA
PHS19103	316	150	19
PHS19103	316	225	19
PHS19103	316	300	19
PHS19103	316	425	19
PHS19103	316	600	19
PHE19103	304	150	19
PHE19103	304	225	19
PHE19103	304	300	19
PHE19103	304	425	19
PHE19103	304	600	19
PHC19103	201	150	19
PHC19103	201	225	19
PHC19103	201	300	19
PHC19103	201	425	19
PHC19103	201	600	19

STAINLESS STEEL RETURN TO DOOR TYPE PULL HANDLE BOLT FIX



FEATURES:-

- Material Stainless Steel.
- Single Pull Handle.
- Bolt through fixing
- To suit doors up to 55mm thick

Finish Available : SS, PSS

TECHNICAL DATA

ITEM CODE	SS GRADE	LENGHT	DIA
PHS22103	316	150	22
PHS22103	316	225	22
PHS22103	316	300	22
PHS22103	316	425	22
PHS22103	316	600	22
PHE22103	304	150	22
PHE22103	304	225	22
PHE22103	304	300	22
PHE22103	304	425	22
PHE22103	304	600	22
PHC22103	201	150	22
PHC22103	201	225	22
PHC22103	201	300	22
PHC22103	201	425	22
PHC22103	201	600	22



STAINLESS STEEL GUARDSMAN PULL HANDLES BOLT FIX



TECHNICAL DATA

ITEM CODE	LENGHT	DIA
FHC0001	4"	19
FHC0002	6"	19
FHC0003	8"	19
FHC0004	10"	19
FHC0005	12"	19
FHC0006	14"	19
FHC0007	16"	19
FHC0008	18"	19
FHC0009	24"	19

FEATURES:-

- Material Stainless Steel.
- Single Pull Handle.
- Bolt through fixing
- To suit doors up to 55mm thick

Finish Available : SS, PSS

STAINLESS STEEL PULL HANDLE ON PLATE



OP03

FEATURES:-

- Material Stainless Steel
- Single pull handle on Plate 300x75x3mm
- Bolt through fixing
- To suit doors up to 55mm Thick
- Available in Gr.304, Gr.316
- Also Available with on Rose and on Plate

Finish Available : SSS, PSS



STAINLESS STEEL PULL HANDLE ON ROSE



PHE22003

FEATURES:-

- Material Stainless Steel.
- Single Pull Handle.
- Bolt through fixing
- To suit doors up to 55mm thick

Finish Available : SS, PSS

REPAIR ESCUTCHEONS

COMING SOON



SIGNAGE & PICTOGRAM (ROUND & RECTANGULAR)



MALE
ADSS0020



DISABLE
ADSS0019



FEMALE
ADSS0021



**FIRE DOOR
KEEP CLEAR**
ADSS0029



UNISEX
ADSS0017




**FIRE DOOR
KEEP LOCKED**
ADSS0025



PUSH
ADSS0024



**FIRE DOOR
KEEP SHUT**
ADSS0022




PULL
ADSS0023



**AUTOMATIC FIRE
DOOR KEEP
CLEAR**
ADSS0028

Other Product Range

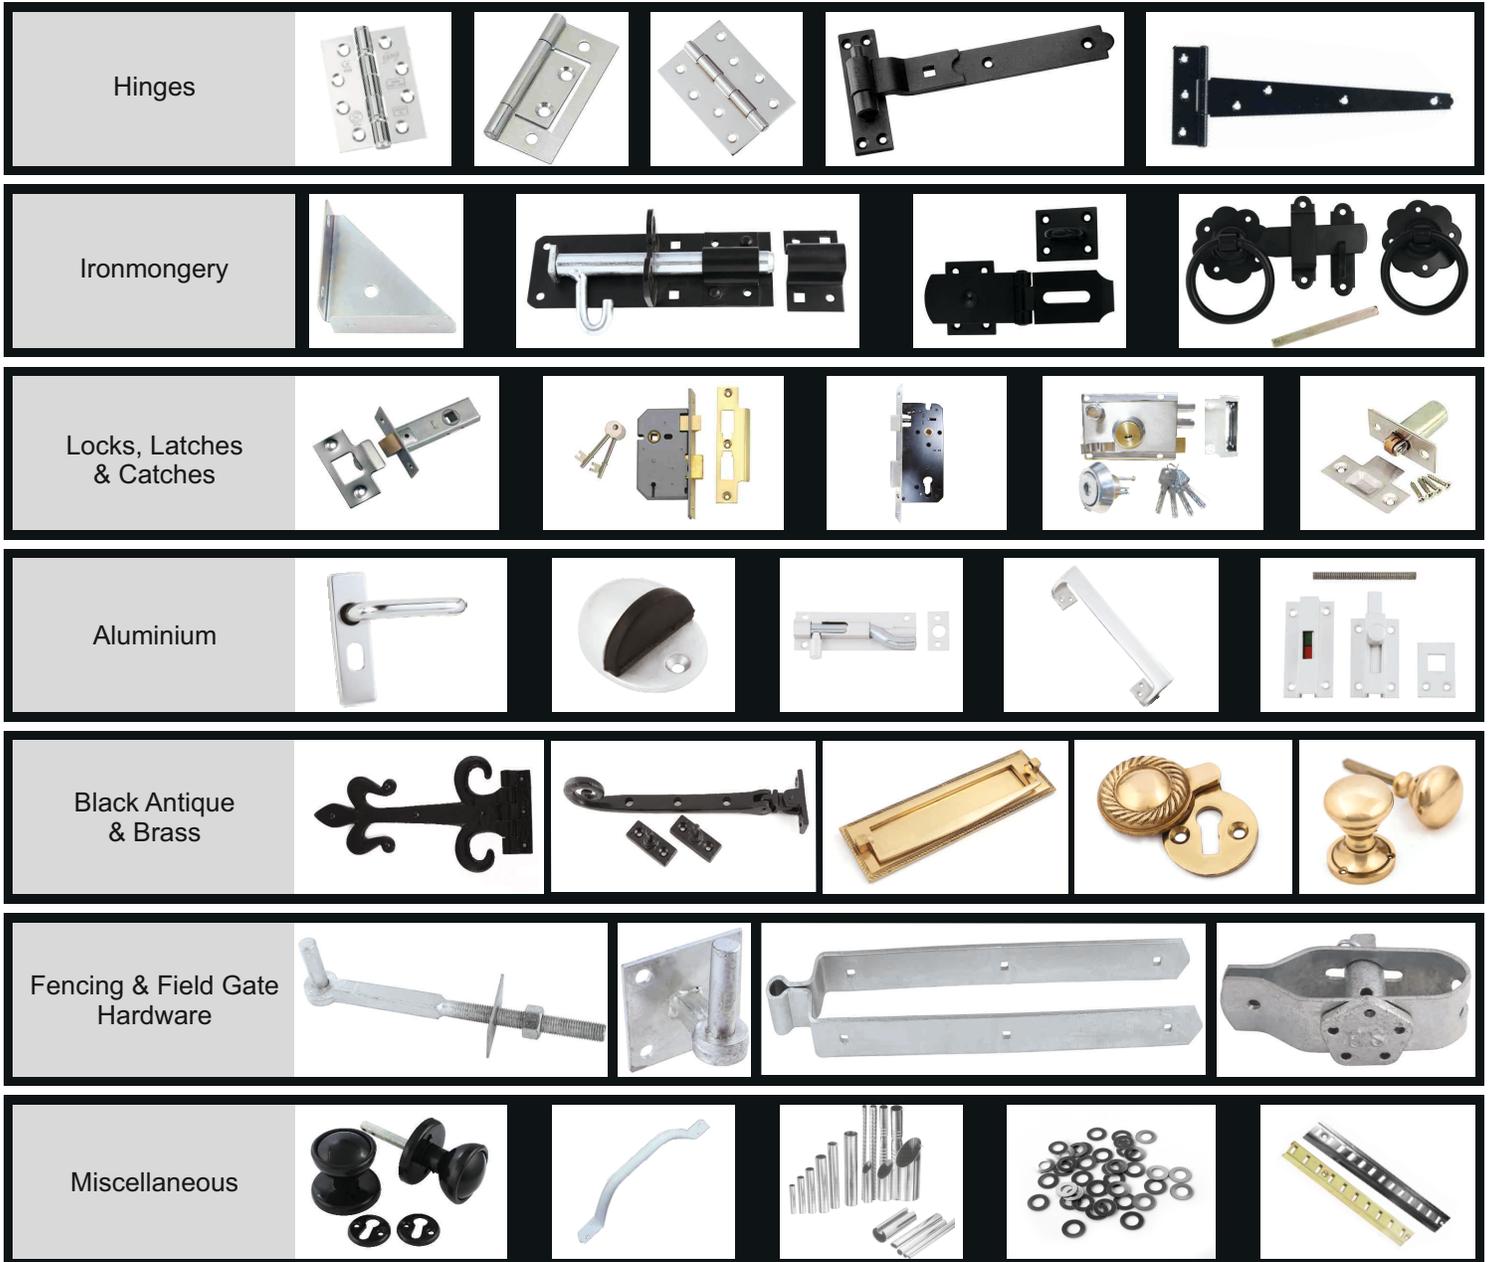

D. P. GARG & CO. PVT. LTD.

An ISO : 9001 : 2008 , 14001 : 2004, 18001 : 2007 Certified Company

A Government of India Recognised Star Export House

B-210 B, Phase - 2, Noida - 201305 (U.P.) INDIA

Ph.: +91-120-2460071, 2460085 to 87, 3290554, 3290445 Fax : +91-120-2460083, 2424519, 2424452

Email : smg@garglocks.co.in

Visit us at : www.garg-hinges.com, www.garglocks.co.in , www.elitelocks.co.in